FABRICS
SELECTION

CHARME

Categoria M

cubo rosso®
www.cuborosso.com

CHARME

col. 20

col. 130

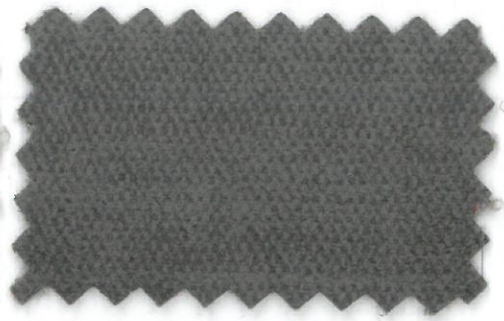

col. 800

col. 13

col. 12

col. 102

col. 28

col. 7

col. 10

col. 615

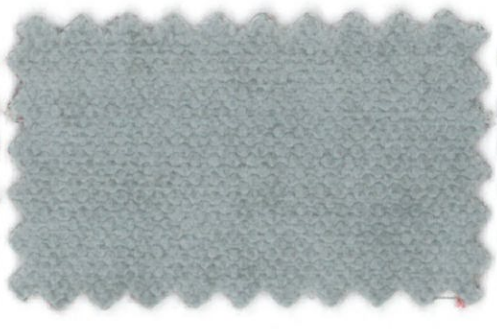

col. 17

col. 15

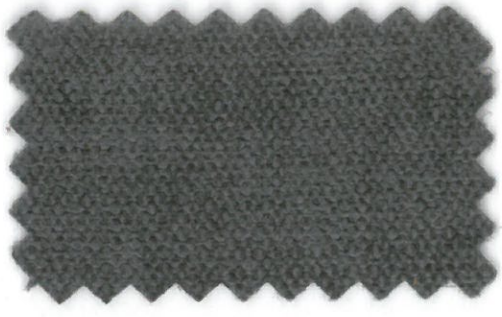

col. 18

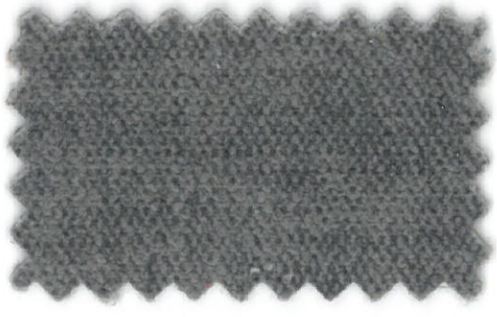

col. 205

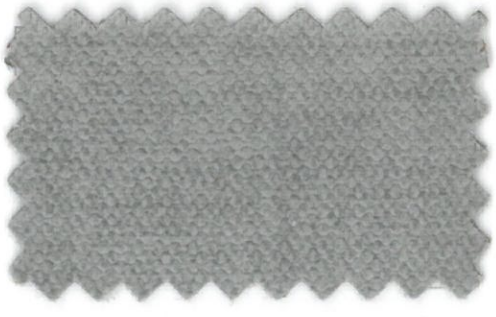

col. 27

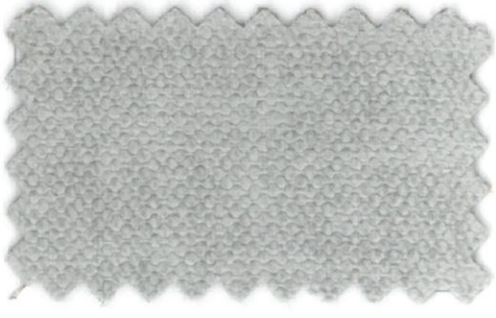

col. 626

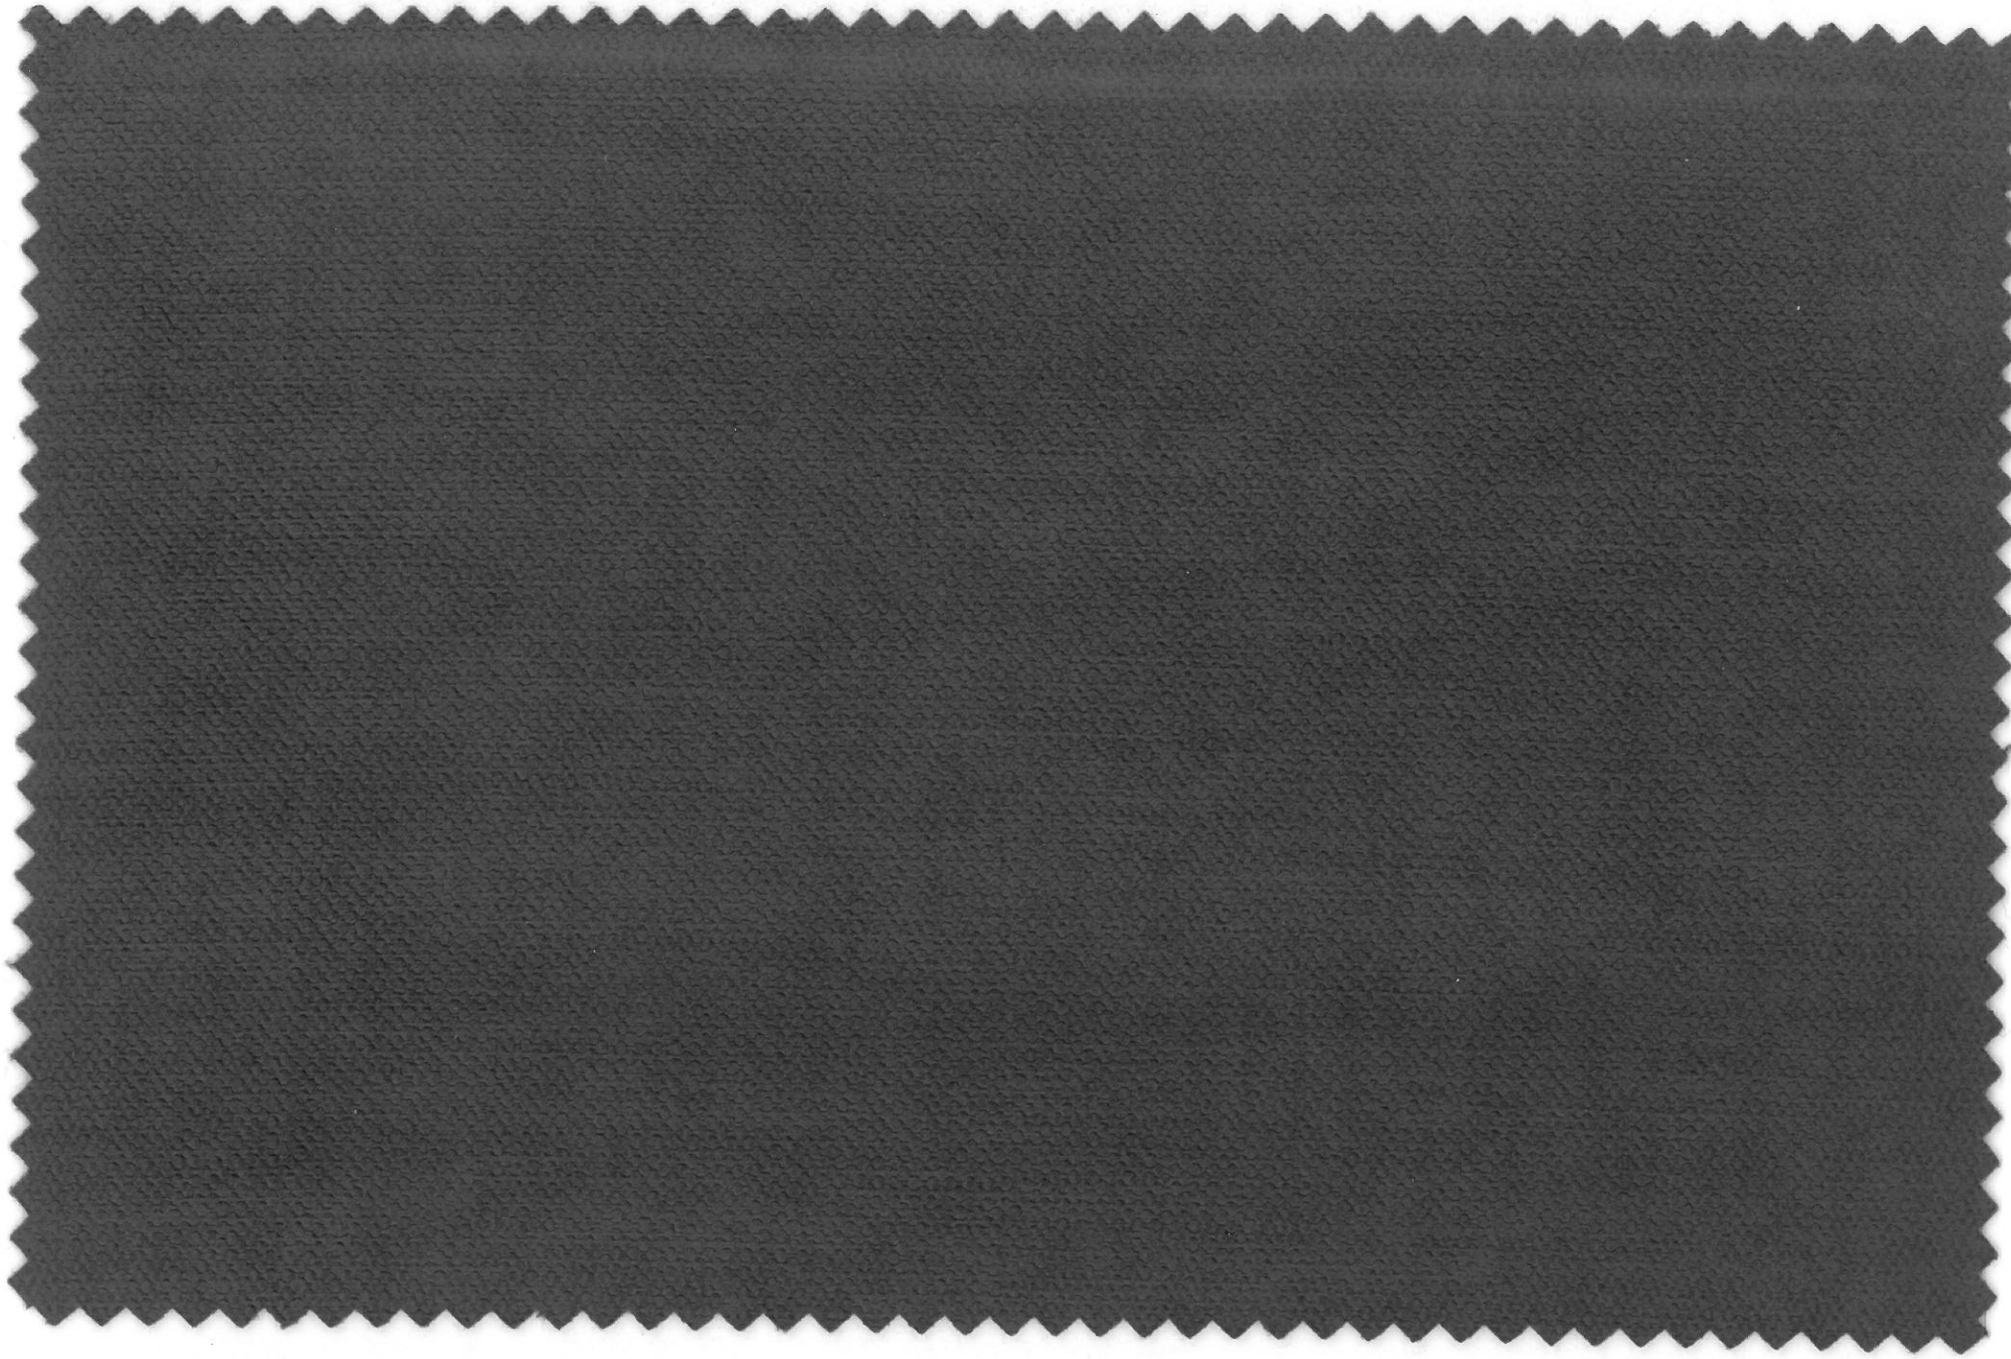

CHARME

Specifiche tecniche
Technical Specifications

COMPOSIZIONE / Composition Surface - EU 1007/2011	100% PL
PESO / Weight m² - DIN EN 12127	400 gr/m² (± 5%)
ALTEZZA / Width	140 cm
Abrasion Resistance (Martindale) - UNI EN ISO 12947-1 / UNI EN ISO 12947-1	90.000
Pilling Resistance - UNI EN ISO 12945-2	400 gr/m² (± 5%)
ALTEZZA / Width	4/5
Reststance to seam slip page - UNI EN ISO 13936-2	weft 3 warp 2
Fastness to rubbing - UNI EN ISO 105-X 12	dry 4 wet 4
Fastness to light - UNI EN ISO 105-B02	3/4
Dimensional stability washing - UNI EN ISO 6330	weft 0,6 warp 0,2
Dimensional stability dry - UNI EN ISO 3175-2	weft -0,9 warp -0,3

Maintenance Symbols



Fabric treated with water repellent finish

Slight color tone differences might be possible
Test results were gathered from various samples and therefore represent avarage indicative values.

CERTIFICATION ISO 14001:2015
CERTIFICATION OHSAS 18001:2007

E C O
P A T H

FORM DESIGN s.r.l.
via I. Newton, 1
70024 - Gravina in Puglia (BA)
tel. 080/3255861 - fax 080/3255851